


# ALUTEX

- Aluminium backed technical Trevira CS fabric with high solar reflectance properties
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Proven acoustic properties


## APPLICATIONS



Not suitable:  
SG 4905

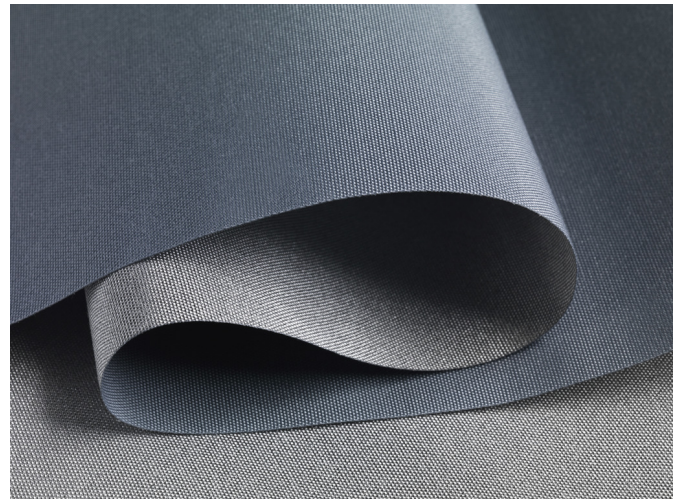

## FABRIC PROPERTIES


 Semi transparent

 Polyester Trevira CS, aluminium backed

 220 g/m<sup>2</sup>

 0.43 mm

 ← max. → 235 cm

 8.9 cm, 12.7 cm, 240 cm

## FEATURES / TECHNICAL PROPERTIES

 5-6

 Alpha-w = 0.45 / 0.60

 Flame retardant

 Optimised for workstations

 Low heat transmittance

 Digital printing

 Oeko-Tex

 Special colours from 500 m

## WASHING INSTRUCTIONS



## FIRE PROTECTION

B-s1,d0 (EN 13501-1)

B1 (DIN 4102-1)

M1 (NF P 92-503/5/7)

Type B (BS 5867-2)

NFPA 701



**Alutex**
**OPTICAL AND SOLAR COEFFICIENTS ( $\pm 5\%$ , DIN EN 410)**

Colour	$T_V$	$T_S$	$R_S$	$A_S$	$T_{UV}$	$F_C$	$g_{tot}$
<b>111</b>	7.0	6.0	50.0	44.0	4.0	0.61	0.44
<b>113</b>	5.0	6.0	49.0	45.0	3.0	0.61	0.44
<b>114</b>	3.0	5.0	46.0	49.0	2.0	0.63	0.45
<b>115</b>	2.0	4.0	53.0	43.0	2.0	0.58	0.42

$T_V$  Visible light transmission

$R_S$  Solar reflectance

$T_{UV}$  UV transmission


$g_{tot}$  Total g-value

$T_S$  Solar transmission


$A_S$  Solar absorption

$F_C$  Shading factor


$F_C + g_{tot}$ : Value calculated with glass:  $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$ , DIN EN 13363-1




111



113



114



115

Colours shown are not binding